

Rec'd PCT 02 FEB 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
19 February 2004 (19.02.2004)


PCT

(10) International Publication Number
WO 2004/014682 A1

- (51) International Patent Classification⁷: **B60J 5/04** (74) Agent: ASLUND, Roland; SSAB Hardtech AB, S-971 88 Luleå (SE).
- (21) International Application Number: PCT/SE2003/001258
- (22) International Filing Date: 8 August 2003 (08.08.2003)
- (25) Filing Language: Swedish
- (26) Publication Language: English
- (30) Priority Data:
0202381-0 8 August 2002 (08.08.2002) US
- (71) Applicant (for all designated States except US): **SSAB HARDTECH AB** [SE/SE]; S-971 88 Luleå (SE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **BODIN, Hans** [SE/SE]; Tunnländsvägen 8, S-954 42 Södra Sunderbyn (SE). **JONSSON, Martin** [SE/SE]; Östra Järnvägsplanaden 6, S-972 42 Luleå (SE). **KRISPINSSON, Jan** [SE/SE]; Stationsgatan 24A, S-972 34 Luleå (SE). **WIKSTRÖM, Lars** [SE/SE]; Östra Malmgatan 23, S-972 42 (SE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: A VEHICLE AND A VEHICLE DOOR

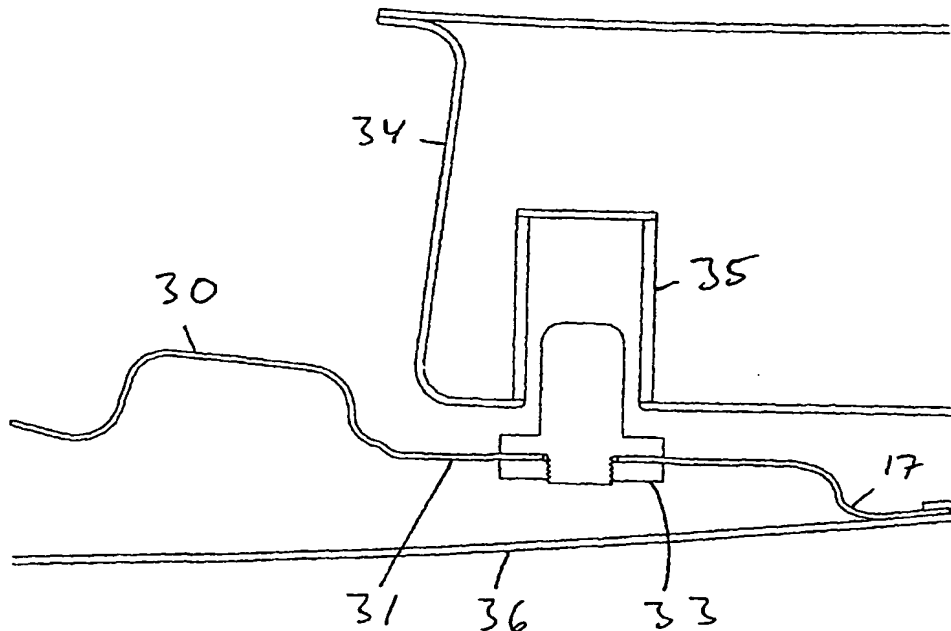

(57) Abstract: A vehicle door has a supporting frame (10) substantially in the form of a rectangular annular hat beam (13-16) of high-strength steel, which, with its outer side flange (17), carries the outer panel (28) of the door and has its crown (12) towards the vehicle interior. The lower rear portion of the outer side flange (17) has a bolt 832 arranged to fit in a hole (35) in the pillar (34). In case of a side impact, the bolt will make the pillar participate in the energy absorption. The frame (10) is comparatively shallow and it can therefore have a high yield strength and all the other elements of the door can be mounted on the inside of the frame, which make them easily available for service.